


# DHI- XVR5232AN-S2

32 Channel Penta-brid 1080P Digital Video Recorder



- Embedded processor
- H.264+/H.264 dual-stream video compression
- Support HDCVI/AHD/TVI/CVBS/IP video inputs
- Max 32 channels IP camera inputs; Max 128Mbps Incoming Bandwidth
- Long transmission distance over coax cable
- Support 2 SATA HDD, up to 16TB

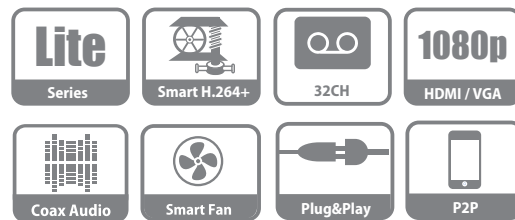

## System Overview

Dahua, as a technology leader, is always the first ever developed the shining new technology in the security industry, and today we present XVR-S2 Series. As the perfect solution to upgrade existing video surveillance systems, XVR supports penta-brid access technology such as HDCVI, AHD, TVI, CVBS and IP to effortlessly integrate with popular industry formats, offering an affordable solution loaded with flexible options. It supports up to 32 channels of HDCVI/ AHD/TVI/CVBS inputs or 32 channels IP camera inputs.

Designed as a full compatibility product, XVR is able to provide end user the simplicity of analog system, namely lower system cost, simple installation and use of existing cable. It is ideal for a wide range of applications such as public safety, retail store, transportation, home protection and education.

## Functions

### Smart H.264+

Smart Codec, H.264+ can reduce up to 70% bit rate and storage requirements without having to invest in new cameras.

### HDCVI/AHD/TVI/CVBS Auto-detect

The XVR can auto recognize the signal of front-camera without any setting. It makes operation more friendly and convenient.

### 5MP Resolution

The XVR supports up to 5MP HD resolution (2560 x 1920) IPC input for recording, live viewing.

### Coaxial Audio/Upgrade/Alarm

The integrated design can reduce wiring troubles which makes it much more cost-effective and convenient for installation.

### Smart Fan

The smart fan can automatically turn on or turn off according to the CPU temperature. This function can effectively reduce the fan noise to provide a better user experience while extending the life of the fan at the same time.

### Spot Output

It is made for a secondary monitor. This allows the operator to view one special monitor that assigned to selected cameras or video inputs from higher security areas.

### Intelligent Video System (IVS)

With built-in intelligent video analytics, the XVR has the ability to detect and analyze moving objects for improved video surveillance. The XVR provides optional standard intelligence at the edge allowing detection of multiple object behaviors such as abandoned or missing objects. IVS also supports Tripwire analytics, allowing the camera to detect when a pre-determined line has been crossed.

### Face Detection

It is a type technology being used in a variety of applications that search or identify individuals which show front cameras.

### Smart Search

This function helps you get more motion detect video during a short time through drawing a region when playback. It is very useful when an emergency occurs.

### Perfect Image Quality

High performance chip provides perfect image quality with better color reproduction.

## Technical Specification

### System

Main Processor	Embedded Processor
Operating System	Embedded LINUX

### Video and Audio

Analog Camera Input	32 Channel, BNC
HDCVI Camera	4MP, 1080P@25/30fps, 720P@50/60fps, 720P@25/30fps
AHD Camera	4MP, 1080P@25/30, 720P@25/30fps
TVI Camera	4MP, 1080P@25/30, 720P@25/30fps
CVBS Camera	PAL/NTSC
IP Camera Input	32 Channel, each channel up to 5MP
Audio In/Out	1/1, RCA
Two-way Talk	Reuse audio in/out, RCA

### Recording

Compression	H.264+/H.264
Resolution	4M-N, 1080P, 1080N, 720P, 960H, D1, HD1, BCIF, CIF, QCIF
Record Rate	Main stream: 4M-N/1080P(1~15fps); 1080N/720P/960H/D1/HD1/BCIF/CIF/QCIF (1~25/30fps) Sub stream: D1/CIF/QCIF(1~15fps)
Bit Rate	1Kbps ~ 6144Kbps Per Channel
Record Mode	Manual, Schedule (Regular, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering), Alarm, Stop
Record Interval	1 ~ 60 min (default: 60 min), Pre-record: 1 ~ 30 sec, Post-record: 10 ~ 300 sec

### Display

Interface	1 HDMI, 1 VGA, 1 TV
Resolution	1920x1080, 1280x1024, 1280x720, 1024x768
Multi-screen Display	1/4/8/9/16/25/36
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording

### Network

Interface	1 RJ-45 Port (1000M)
Network Function	HTTP, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, P2P, IP Search (Support Dahua IP camera, DVR, NVS, etc.)
Max. User Access	128 users
Smart Phone	iPhone, iPad, Android
Interoperability	ONVIF 2.42, CGI Conformant

### Video Detection and Alarm

Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips
Video Detection	Motion Detection, MD Zones: 396 (22 x 18), Video Loss, Tampering and Diagnosis
Alarm input	N/A
Relay Output	N/A

### Playback and Backup

Playback	1/4/9/16
Search Mode	Time /Date, Alarm, MD and Exact Search (accurate to second)
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom
Backup Mode	USB Device/Network

### Storage

Internal HDD	2 SATA Port, up to 8TB capacity
eSATA	N/A

### Auxiliary Interface

USB	1 USB 2.0 , 1 USB 3.0
RS232	N/A
RS485	1 Port, for PTZ Control

### Electrical

Power Supply	DC12V/5A
Power Consumption	<20W (Without HDD)

### Construction

Dimensions	1U, 375mmx287mmx53mm (14.8" x 11.3" x 2.1")
Net Weight	2.35kg (5.2 lb) (without HDD)
Gross Weight	3.2kg (7.05lb)
Installation	Desktop installation

### Environmental

Operating Conditions	-10°C ~ +55°C (+14°F ~ +131°F), 0~ 90% RH
Storage Conditions	-20°C ~ +70°C (-4°F ~ +158°F) , 0~ 90% RH

### Third-party Support

Third-party Support	Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek, and more
---------------------	---


### Certifications

Certifications	FCC: Part 15 Subpart B
	CE: CE-LVD: EN 60950-1/IEC 60950-1 CE-EMC: EN 61000-3-2, EN 61000-3-3, EN 55032, EN 50130, EN 55024
	UL: UL 60950-1

**Ordering Information**


Type	Part Number	Description
32 Channel XVR	DHI-XVR5232AN-S2	32 Channel Penta-brid 1080P 1U Digital Video Recorder

**Dimensions (mm)**

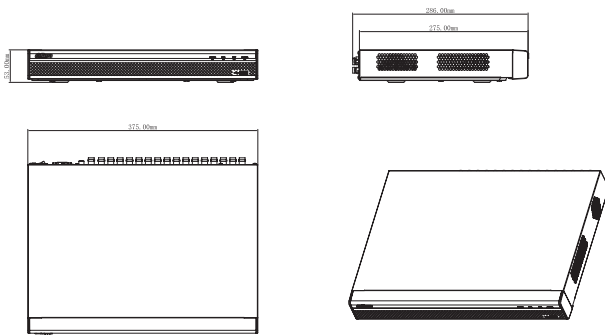

**Rear Panel**

DHI-XVR5232AN-S2

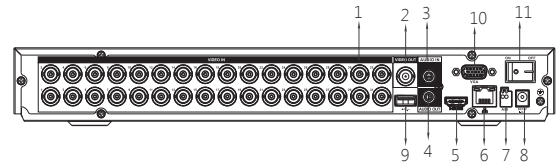

- |   |                          |    |                    |
|---|--------------------------|----|--------------------|
| 1 | VIDEO IN                 | 7  | RS485 Interface    |
| 2 | VIDEO OUT                | 8  | DC 12V Power Input |
| 3 | AUDIO IN, RCA Connector  | 9  | USB Interface      |
| 4 | AUDIO OUT, RCA Connector | 10 | VGA Interface      |
| 5 | HDMI Interface           | 11 | Power Switch       |
| 6 | Network Interface        |    |                    |